

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
30 June 2005 (30.06.2005)

PCT

(10) International Publication Number
WO 2005/058510 A1

(51) International Patent Classification⁷: B05C 1/00,
17/00, B43M 11/02

Michael, B. [US/US]; 11045 Lake Ave, Suite 13, Cleveland, OH 44102 (US).

(21) International Application Number:
PCT/US2004/042066

(74) Agents: NAUMAN, Timothy, E. et al.; Fay, Sharpe, Fagan, Minnich & McKee LLP, 1100 Superior Avenue, 7th Floor, Cleveland, OH 44114 (US).

(22) International Filing Date:
15 December 2004 (15.12.2004)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/530,097 16 December 2003 (16.12.2003) US

(71) Applicant (for all designated States except US): TRAC
TOO LLC [US/US]; 16116 Puritas Ave., Cleveland, OH
44135 (US).


(72) Inventor; and

(75) Inventor/Applicant (for US only): PUCZKOWSKI,

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: FLUID APPLICATOR ASSEMBLY

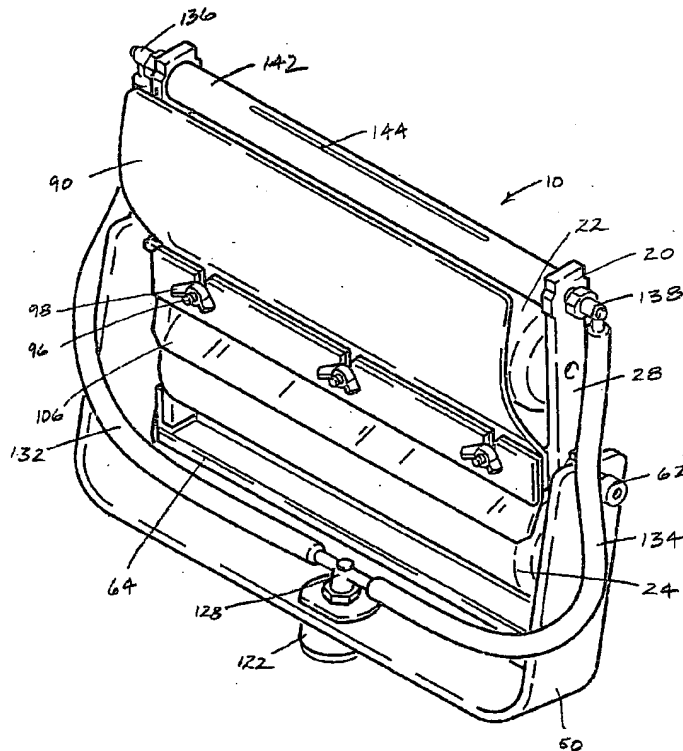

(57) Abstract: A fluid applicator assembly can include a frame, a first roller connected to the frame, a second roller connected to the frame, a fluid supply tube connected to the frame, a supply line, and a handle bar pivotally connected to the frame. The second roller connects the frame spaced from the first roller. The supply tube connects to the frame spaced from the first roller and includes a discharge opening. The fluid supply line communicates with the fluid supply tube and an associated paint source. The handle bar is adapted to attach to an associated handle for maneuvering the assembly.



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*